E2639
Ammonia Detector



Evikon

Sensor Technologies
Measurement & Control Instrumentation

evikon.eu

Standalone and multifunctional

E2639 is a next-generation product developed to deliver reliable detection of toxic and combustible gases in a wide range of market sectors such as:

- HVAC/R
- Agriculture
- Food and beverage
- Healthcare and laboratories
- Process industries

The detector is based on the unified PluraSens® Platform having RS485 Modbus RTU and 2 × 4-20 mA outputs offering customers different possibilities for communication with controllers and SCADA systems.

E2639 is also equipped with 3 x SPDT relays (2 for alarms, 1 for fault) accompanied with 4 x LEDs and a buzzer for better safety and visual, audible indication.

Most of known sensing technologies are implemented providing a possibility to detect more than 20 different gases and gas groups.



Convenience of use

User-oriented installation

E2639 is equipped with **3 x M20 cable glands** and **duplicated terminals** to save time during installation.

Enclosure design features side **mounting brackets** making mounting of the detector easier.

Pre-calibrated Smart Sensors

GSH Smart Sensors come **already pre-calibrated.**

M12 connector enables fast sensor replacement without the need to open the enclosure lid.

Being fully **interchangeable**, any GSH Smart Sensor can be connected to the same E2639 main unit (for example, HFC sensor can be replaced with CO_2 or NH_3 sensor and so on) and purchased separately.

Built-in calendar can notify end customers when calibration is due.

Multiple calibration possibilities

Optional **WiFi module** gives a possibility of connection to a smartphone or tablet PC for convenient calibration and configuration.

No additional apps are required. Access is provided via URL and password protection with multiple levels of access.

GSH Smart Sensors calibration can be done through E2639 or by connecting the GSH module directly to PC using special **configurator (SSC).**

24V OUT | IP65 | 4-20 mA | RS485 Modbus

Ammonia Detector
E2639-NH3




Features

- 2 x 4-20 mA user configurable analog outputs
- RS485 Modbus RTU digital interface
- 3 x SPDT Relays: 2 for alarms, 1 for fault
- 2 x 24 V outputs for controlling alarm signals*
- Magnetic button for alarm reset & WiFi enable
- WiFi interface option for configuration and calibration

Specifications

Calibration	Ammonia NH_3			
Sensor type	Electrochemical (EC)			
Sampling method	Diffusion			
Typical detection ranges, ppm	0...100	0…300	0…1000	0…5000
Maximum overload, ppm	200	500	1500	10 000
Response time T90, s	< 75	<75	<75	<120
Resolution / digital unit	1 ppm			
Signal update	Every 1 second			
Sensor lifetime	> 2 years			
Maintenance interval	6 months			
Self-diagnostics	Full functionality check at start-up			
Warm-up time	≤ 1 min			
Power supply	14...36 VDC (default)			
	24 VAC or 230 VAC as options			
Power consumption	< 6 VA**			
Digital interfaces	RS485, Modbus RTU protocol			
	2.4 GHz WiFi (802.11 b/g/n) option			
Relays	3 × SPDT relays (2 for alarms, 1 for fault)			
Outputs	2 × 4-20 mA analog outputs, user configurable			
	2 x 24 V outputs (for controlling alarm signals)			
Output scale width	Recommended: 5-100% of the range; > 10 × resolution in any case			
Enclosure	Grey ABS plastic, wall mount, protection class IP65			
Dimensions	H80 × W190 × D55 mm (housing only) H109 with cable glands			
Operating conditions	-40...+50 °C, -30...+50 °C (for 0...5 000 ppm), 15...90 %RH			
Alarm signalling				
Visual	4 x LEDs (red, green and yellow)			
Acoustic	Buzzer 85 dB			
Applicable standards	EN378-3; EN62990-1; EN61010-1; EN50270; EN50271; ASHRAE 15			

Dimensions

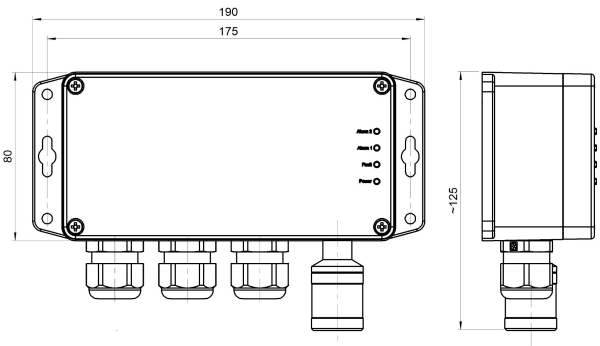

* 24V outputs are relative to power supply e.g. supplied voltage of device is transferred to output voltage
** Does not consider 24V output connected device consumption


GSH Smart Sensors Specification

Connector	M12 industrial circular
Service counter	Built-in calendar indicates when calibration is due
Calibration	Through E2639 or by connecting to SSC configurator
Remote sensor probe (option)	Shielded cable up to 5 m length
Sensor head dimensions	Ø25 mm, height 54 mm



E2639-GSH Dimensions



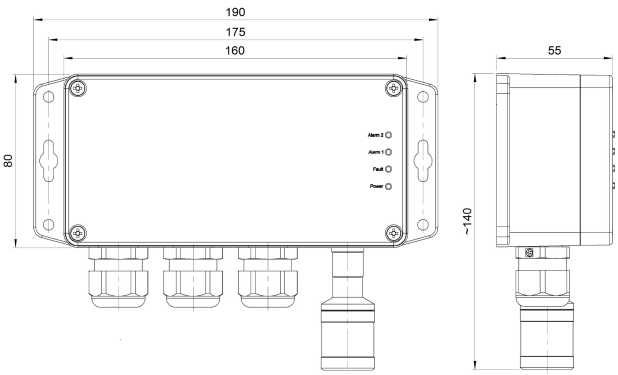

Ordering code for E2639-NH3 standard version

Target gas	NH3				
Sensor type	-EC (for electrochemical sensor)	Other technologies available on request			
Detection range	-100 (for 0…100 ppm)	-300 (for 0…300 ppm)	-1000 (for 0…1000 ppm)	-5000 (for 0…5000 ppm)	Other ranges available on request
WiFi	-WF (yes)	Leave the field empty (no)			
Power supply	-24VDC	-24VAC	-230VAC		

Code examples: E2639-NH3-EC-100-WF-230VAC

Ordering code for version with Smart Sensor

E2639-GSH main unit *			
WiFi	-WF (yes)	Leave the field empty (no)	
Power supply	-24VDC	-24VAC	-230VAC

* Can be supplied separately

Code example: E2639-GSH-WF-24VDC

GSH-NH3 Smart Sensor *					
Target gas	NH3				
Sensor type	-EC (for electrochemical sensor)	Other technologies available on request			
Detection range	-100 (for 0…100 ppm)	-300 (for 0…300 ppm)	-1000 (for 0…1000 ppm)	-5000 (for 0…5000 ppm)	Other ranges available on request
Remote probe (option)	-RP	Leave the field empty (if no remote probe)			
Length of remote probe (m)	-3	-5	Other length on request		

* Can be supplied separately

Code examples: GSH-NH3-EC-100-RP-3

Disclaimer

This document is subject to change.

The latest and actual version is located on the Manufacturer's web page.

evikon.eu