

MHF49

Magnetic heating filter

APPLICATION

The magnetic heating filter is used to filter out contaminants (e.g. sludge, sand, rust, iron particles etc.) that arise from the regular operation of a heating system. Thus, premature wear and failure of the heating system arising from contaminants can be prevented.

SPECIAL FEATURES


- Simple installation and maintenance
- Rotatable connection for any installation position
- Suitable for dosages of 0.5 liters of chemicals
- Integrated isolation valve, inlet and outlet side
- Pipe cutter guide



TECHNICAL DATA

Media	Medium: Water or water-glycol mixture, quality according to VDI 2035 (up to 50% glycol)
Connections/Sizes	
Internal threads:	22 mm, 28 mm
Compression fittings:	3/4", 1"
Pressure values	
Max. operating pressure:	6 bar
Operating temperatures	
Operating temperature:	5 - 90 °C

CONSTRUCTION

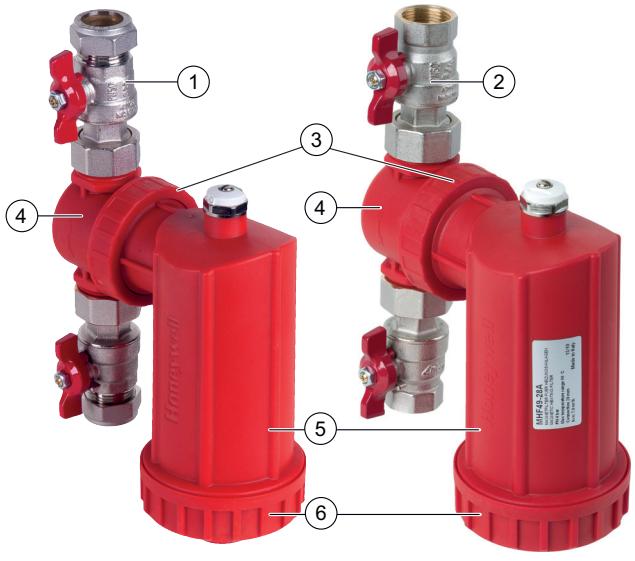Overview	Components	Materials
	1 Isolation valves - with compression fittings: 22mm, 28mm	Nickel-plated brass
	2 Isolation valves - with internal thread: 3/4", 1"	Nickel-plated brass
	3 Large fastening ring	Glass-fibre reinforced Polyamide
	4 Diverter	Glass-fibre reinforced Polyamide
	5 Housing	Glass-fibre reinforced Polyamide
	6 Housing end cap	Glass-fibre reinforced Polyamide
	Not depicted components:	
	Fine filter mesh	Stainless steel
	Magnet	Neodymium (tested according to IEC 60404-5 & ASTM A977)
	Removable sheath	High-quality synthetic material
	Seals	EPDM

METHOD OF OPERATION

Through a specifically designed path the medium is forced to pass within the filter cartridge mesh and in the filter chamber. There a combined action of the filter mesh, magnet and inner geometry of the Filter chamber, allow heavy particles to sink to the bottom, while the magnet inside the filter captures any rust and iron particles.

In that way impurities (eg. sludge, sand, rust, iron particles) normally found in a central heating system can be easily removed and kept inside the filter chamber.

TRANSPORTATION AND STORAGE

Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	-15 °C
Max. ambient temperature:	+60 °C
Min. ambient relative humidity:	25 % *
Max. ambient relative humidity:	95 % *

*none condensing

INSTALLATION GUIDELINES

Setup requirements

- The installation site has to be frost-proof and the protection of the device from chemicals, paints, detergents, solvents and their vapours and environmental influences must be guaranteed
- The magnetic heating filter is not suited for:
 - The separation of oils, greases, solvents, soaps and other lubricating media
 - The separation of water-solvent materials
- The magnetic heating filter is installed in the heating circuit. For best performance we recommend to install MHF49 in the return line of the heating circuit downstream of the last radiator
- If the circulating pump is installed in the return of the heating circuit, please ensure that the filter is installed upstream of the circulating pump
- The heating system needs to be drained down before installation
- Installation, commissioning and maintenance may only be performed by qualified personnel
- Use the pipe cutter guide
- The connection piece can be installed into both horizontal and vertical pipework
- The magnetic heating filter has to be installed with the air vent pointing upwards
- Make sure all seals are tight before filling the heating system
- Ensure good access for simple maintenance and inspection

Installation Example

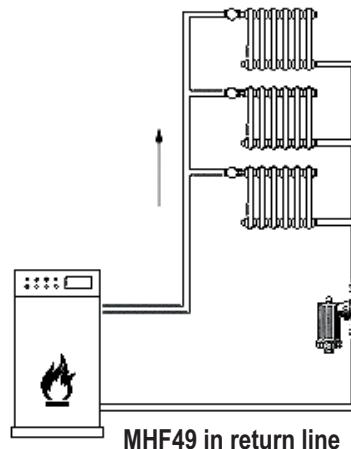


Fig. 1 Standard installation example for the magnetic heating filter

TECHNICAL CHARACTERISTICS

kvs-Values

Connection sizes:	22 mm	28 mm	3/4"	1"
k _{vs} -value (m ³ /h):	6.5	7.0	6.8	7.5

Pressure drop characteristics


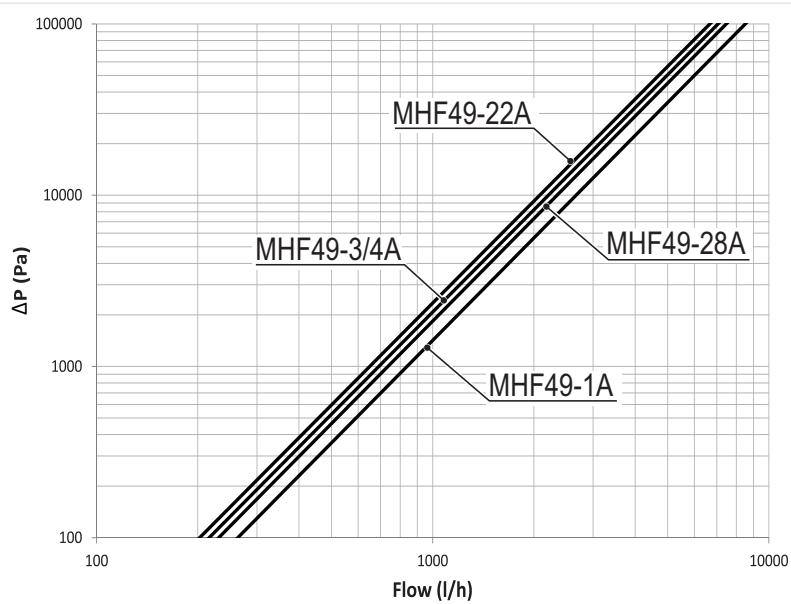


Fig. 2 Pressure drop within the valve in dependency of the flow rate and the used connection size

DIMENSIONS

Overview

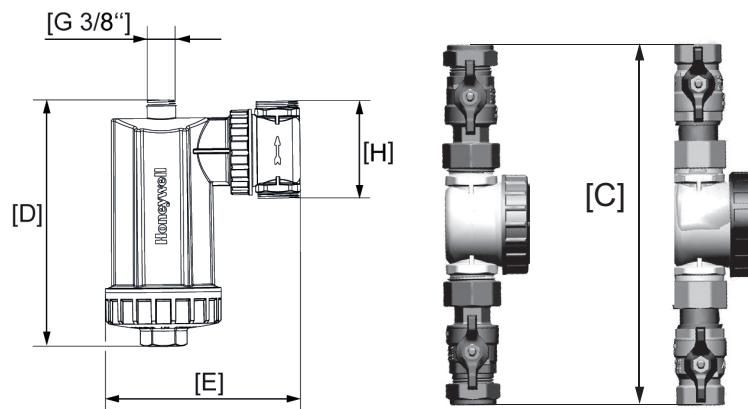

Parameter	Values				
Connection sizes:	mm	22	28	3/4"	1"
Weight:	kg	1.19	1.51	1.114	1.40
Dimensions:	C	239	271	220	252
	D	189	189	189	189
	E	153	153	153	153
	H	98	98	98	98

Note: All dimensions in mm unless stated otherwise.

ORDERING INFORMATION

The following tables contain all the information you need to make an order of an item of your choice. When ordering, please always state the type, the ordering or the part number.

Options

The magnetic heating filters are available in the following sizes: 3/4" and 1" internal thread, 22 mm and 28 mm compression fittings

- standard
- not available

		MHF49-22A	MHF49-28A	MHF49-3/4A	MHF49-1A
Connection size:	22 mm compression fittings	•	-	-	-
	28 mm compression fittings	-	•	-	-
	3/4" internal thread	-	-	•	-
	1" internal thread	-	-	-	•

Environmental & Energy Solutions

Honeywell GmbH
Hardhofweg
74821 MOSBACH
GERMANY
Phone: (49) 6261 810
Fax: (49) 6261 81309
<http://ecc.emea.honeywell.com>

Manufactured for and on behalf of the
Environmental and Combustion Controls
Division of Honeywell Technologies Sàrl, Z.A.
La Pièce 16, 1180 Rolle, Switzerland
by its Authorised Representative Honeywell GmbH
ENOH-1555GE23 R0817
Subject to change
© 2017 Honeywell GmbH

Honeywell